

LF1100TW-G5 -925.940-09 L2

LINEARlight FLEX Tunable White IP00 | 线性LED软灯带 适用于灵活和个性化的照明解决方案



产品特点

- 24 V LED strips flexible and cuttable
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

产品优势

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- 得益于背侧自粘胶带，可以方便地安装在各种光滑表面上
- 非凡设计、高品质材料
- Pre-soldered wires

应用领域

- 暗槽照明
- 商店照明
- 办公室



产品数据表

技术参数


电参数

标称电压	24.0 V
电流类型	DC
每米标称功率	10.4 W
额定功率	93.60 W
输入电压范围	23...25 V
Accidental reverse input voltage protection up to	25 V

光度数据

LED 光色	Dynamic White
色温	2500...4000 K
显色指数 Ra	90
每米光通量	1156 lm
发光效率	111 lm/W
色彩匹配标准偏差	≤3 sdc _m
EN 12464-1 标准光色	2500...4000 K
色温	3200 K

尺寸和重量

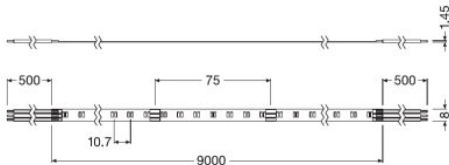

长度	9000 mm
接线长度	500.0
产品重量	104.00 g
输入端线缆截面	0.5 mm ²
宽度	8.00 mm
高度	1.40 mm

温度

产品数据表

工作温度范围	-20...+85 °C ¹⁾
仓储温度范围	-40...85 °C

¹⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

更多的产品数据

ID of contained light source [AGGR]	LS_TRV_286062
-------------------------------------	---------------

认证与标准

标准	CE/ENEC/EAC
Energy efficiency class of the contained light source	F

物流数据

商品编码	85395100000
------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	09-06-2023
Primary Article Identifier	4062172189279
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	39d314f8-b6f9-41f5-acad-622e0887ed2a

设备/配件

- 简化了可选匹配连接系统的连接
- Perfectly matched with OTi DALI 50/80 4CH DT6/8 and OTi DALI 160 2CH DT6/8
- Perfectly matched with OTi BLE 80/220-240/24 4CH

数据表文本

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

下载数据

文件

产品数据表

	User instruction LINEARlight FLEX, Tunable White
	Product Datasheet LINEARlight Flex Tunable White CRI90 Specification Sheet (EN)
	小册子 Light is freedom of design (EN)
	证书 VDE ENEC CERTIFICATE 40052516 160823
	证书 LF(P) TW G5 CB 180121
	统一宣言 LR FLEX TW2 CE 4249165 02 020823
	Eulumdat LF1100TW-G5-925.940-09 L2 LTD 130421
	IES data LF1100TW-G5-925.940-09 L2 IES 130421

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172189279	LF1100TW-G5 -925.940-09 L2	箱 8	241 mm x 195 mm x 205 mm	9.63 dm³	1765.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

产品数据表

可选择性配件

产品描述	配件名称	配件代码
LF1100TW-G5 -925.940-09 L2	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -925.940-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

免责声明

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.