


DALIECO BT RTC CONTROL

DALI ECO BT RTC | 灯光管理系统的控制元件

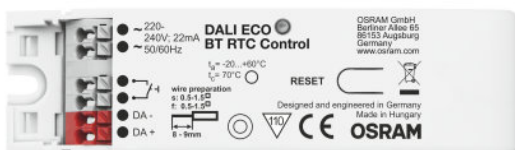

产品特点

- Compact light control with DALI interface
- Integrated clock for time based control of brightness and color temperature (HCL)
- Adaptable HCL curve with up to 24 points
- Up to 32 DALI luminaires connectable
- Supports up to 4 OSRAM DALI sensors and pushbutton couplers
- 根据日光进行灯光调节，根据是否有人进行灯光控制
- Pushbutton interface to separately control brightness and color temperature
- Supports DALI DT8 Tunable White driver
- 输出，带有电可逆过温、短路和过载保护功能
- DALI控制电缆的长度：最大 300 m
- Suitable for luminaire integration

产品优势

- Daytime depending change of brightness and color temperature (HCL)
- Suitable for Human Centric Lighting Applications (HCL)
- Control the light via Smartphone
- Adjustment of all settings via smartphone
- Up to 4 timers with ON-/OFF-Time and weekday configurable
- 预定义运行模式使设置操作更加简易
- Adjustable Offset for different groups
- Easy Scene creation via App
- Selected DALI parameters changeable via APP

应用领域

- 落地式灯具
- 办公室
- 会议室
- 培训室
- 教室
- 走廊
- 商店照明


产品数据表

技术参数

电参数

标称电压	230 V
市电频率	50/60 Hz

尺寸和重量

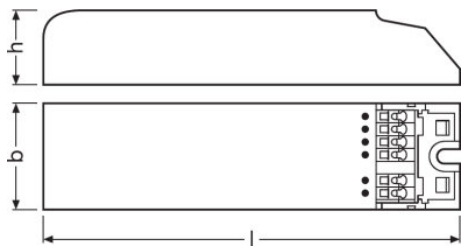

长度	1080 mm
宽度	300 mm
高度	210 mm
产品重量	4500 g

温度

环境温度范围	-20...+60 °C
--------	--------------

功能

调光界面	DALI
发射范围	15 m
安装类型	一体式灯具/Independent mounting
控制器输出端数量	1
Scenes	16 ¹⁾
Max. connectable push button couplers	4 ²⁾
App Control	Yes (Android/ iOS)
Commissioning tool	App (Android/ iOS)

¹⁾ Each DALI ECG can store up to 16 light scenes.

²⁾ Max number pro DALI line. The actual number depends on the total number of DALI devices (couplers, sensors and ECGs) connected on the same DALI line

认证与标准

防护类型	IP20
------	------

产品数据表

物流数据

商品编码	85371098990
------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-08-2023
Primary Article Identifier	4062172016537
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	89a99172-4aa3-4c2a-a1c9-ebb30f9db2de

下载数据

文件	
	User instruction DALIeco BT RTC control
	User instruction DALIeco BT RTC control
	证书 DALI Zigbee DALI VDE 40047700 080422
	统一宣言 DALIeco BT RTC CE 3768501 02 160823
	CAD数据 DALIECO BT RTC CONTROL IGS 220120
	CAD数据 DALIECO BT RTC CONTROL STEP 220120
	CAD数据 DALIeco BT ECO CI KIT STEP 250220
	CAD数据 DALIeco BT ECO CI KIT IGS 250220
	CAD数据2 DALIECO BT RTC CONTROL CAD2PDF 220120
	CAD数据2 DALIeco BT ECO CI KIT CAD2PDF 250220
	CAD数据3 DALIECO BT RTC CONTROL CAD3PDF 220120
	CAD数据3 DALIeco BT ECO CI KIT CAD3PDF 250220

产品数据表

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172016537	DALIECO BT RTC CONTROL	箱 25	223 mm x 197 mm x 179 mm	7.86 dm ³	1787.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.