

BackLED M Plus G4

招牌和背光照明用 LED 模块



产品优势

- 一致性好的白色光 (标准颜色偏差与 SDCM 相当 : < 3)

应用领域

- 中型尺寸通道文字的背光照明



产品系列数据表

技术参数

产品描述	电参数						光度数据
	标称电压	单链标称功率	单个 LED 模块的标称功率	Accidental reverse input voltage protection up to	输入电压范围	电流类型	色温
BA-M-CP-880 G4	120 V	2880 W	0.72 W	13 V	12...13 V	DC	8000 K
BA-M-CP-865 G4	120 V	2880 W	0.72 W	13 V	12...13 V	DC	6500 K
BA-M-CP-840 G4	12.0 V	28.80 W	0.72 W	13 V	12...13 V	DC	4000 K
BA-M-CP-BLUE G4	120 V	2400 W	0.6 W	13 V	12...13 V	DC	

产品描述	显色指数 Ra	EN 12464-1 标准光色	LED 光色	单个模块链的光通量	单个 LED 模块的光通量	发光效率	色彩匹配标准偏差
BA-M-CP-880 G4	≥80	白色	白色	3160 lm	79 lm	1097 lm/W	≤5 sdc
BA-M-CP-865 G4	≥80	白色	白色	3280 lm	82 lm	1139 lm/W	≤3 sdc
BA-M-CP-840 G4	≥80	白色	白色	3280 lm	82 lm	113.9 lm/W	≤3 sdc
BA-M-CP-BLUE G4		蓝色	蓝色	360 lm	9 lm	15 lm/W	≤2 sdc

产品描述	LED 模块信息			尺寸和重量	
	模块LED颗粒数	单个链中的 LED 模块数量	LED 模块的最小可操作数量	长度	宽度
BA-M-CP-880 G4	3	40	1	81680 mm	138 mm
BA-M-CP-865 G4	3	40	1	81680 mm	138 mm
BA-M-CP-840 G4	3	40	1	8168 mm	13.8 mm
BA-M-CP-BLUE G4	3	40	1	81680 mm	138 mm

产品描述	高度	产品重量	温度	更多的产品数据	功能	
			仓储温度范围	后继 EAN	可调光	调光范围
BA-M-CP-880 G4	680 mm	27000 g	-30...85 °C	4052899592971	是	1...100 %
BA-M-CP-865 G4	680 mm	27000 g	-30...85 °C	4052899592995	是	1...100 %
BA-M-CP-840 G4	6.80 mm	270.00 g	-30...85 °C	4052899593022	是	1...100 %
BA-M-CP-BLUE G4	680 mm	27000 g	-30...85 °C	4052899593114	是	1...100 %


产品描述	认证与标准		物流数据	Environmental information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
	能耗	防护类型	商品编码	Date of Declaration
BA-M-CP-880 G4	29 kWh/1000h		85395100000	05-05-2023
BA-M-CP-865 G4	29 kWh/1000h	IP66	85395100000	21-08-2023
BA-M-CP-840 G4	29 kWh/1000h	IP66	85395100000	21-08-2023
BA-M-CP-BLUE G4	24 kWh/1000h		85395100000	21-08-2023

产品系列数据表

产品描述	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction
BA-M-CP-880 G4	4062172183277	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
BA-M-CP-865 G4	4062172183352	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
BA-M-CP-840 G4	4062172183376	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
BA-M-CP-BLUE G4	4062172183437	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.

产品描述	Declaration No. in SCIP database
BA-M-CP-880 G4	cf509853-46fd-4fdb-87bc-e07dfed6a8e8
BA-M-CP-865 G4	98160f6b-c663-4307-a3ce-11237f605a76
BA-M-CP-840 G4	b8b42c6d-71d8-4063-b9cf-23e1f521e4b9
BA-M-CP-BLUE G4	fa38de6d-e91b-4c18-b4c7-ca86f52e4d6f

产品系列数据表

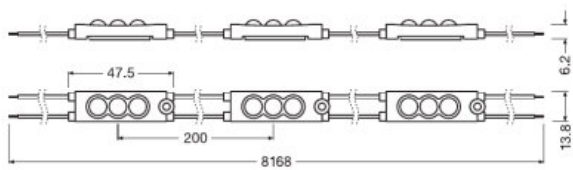

BA-M-CP G4

应用建议

更多详细应用信息和图形,请参阅产品数据表。

销售和技术支持

销售和技术支持 www.osram.cn

下载数据

文件	
	User instruction BackLED SM CP G4 UI OSRAM
	小册子 Technical application guide BackLED and BoxLED portfolio (EN)
	统一宣言 CE declaration BA M CP G4

产品系列数据表

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172183277	BA-M-CP-880 G4	箱 50	435 mm x 435 mm x 310 mm	58.66 dm ³	15281.00 g
4062172183352	BA-M-CP-865 G4	箱 50	435 mm x 435 mm x 310 mm	58.66 dm ³	15281.00 g
4062172183376	BA-M-CP-840 G4	箱 50	435 mm x 435 mm x 310 mm	58.66 dm ³	15281.00 g
4062172183437	BA-M-CP-BLUE G4	箱 50	435 mm x 435 mm x 310 mm	58.66 dm ³	15282.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

可选择性配件

产品描述	配件名称	配件代码
BA-M-CP-880 G4	BA -MP-M-CP-2	▶ 4062172168410
BA-M-CP-865 G4	BA -MP-M-CP-2	▶ 4062172168410
BA-M-CP-840 G4	BA -MP-M-CP-2	▶ 4062172168410
BA-M-CP-BLUE G4	BA -MP-M-CP-2	▶ 4062172168410

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。