

PrevaLED Linear G6

线型LED 模组



产品特点

- 可用光通量：2200 lm 或 4000 lm (560 mm 时)

产品优势

- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation

应用领域

- Office
- 工业



产品系列数据表

技术参数

产品描述	电参数				
	标称电压	标称电流	电流类型	Energy consumption in on-mode [AGGR]	On-mode power [AGGR]
PL-LIN-Z6 2200-827 560X20-HV	471 V	025 安培	DC	12.2 kWh/1000h	12.20 W
PL-LIN-Z6 2200-850 560X20-HV	471 V	025 安培	DC	12.2 kWh/1000h	12.20 W
PL-LIN-Z6 2200-850 560X20-LV	236 V	05 安培	DC	12.4 kWh/1000h	12.40 W
PL-LIN-Z6 4000-840 560X20-LV	427 V	05 安培	DC	22.1 kWh/1000h	22.10 W
PL-LIN-Z6 4000-850 560X20-LV	427 V	05 安培	DC	22.1 kWh/1000h	22.10 W

产品描述	光度数据			
	发光效率	Useful luminous flux (Φuse) [AGGR]	Colour consistency (McAdam ellipses) [AGGR]	Correlated color temperature CCT [AGGR]
PL-LIN-Z6 2200-827 560X20-HV	177 lm/W	1977 lm	3	2700 K
PL-LIN-Z6 2200-850 560X20-HV	196 lm/W	2286 lm	3	5000 K
PL-LIN-Z6 2200-850 560X20-LV	196 lm/W	2287 lm	3	5000 K
PL-LIN-Z6 4000-840 560X20-LV	190 lm/W	3969 lm	3	4000 K
PL-LIN-Z6 4000-850 560X20-LV	190 lm/W	3981 lm	3	5000 K

产品描述	显色指数 Ra	LED 模块信息	尺寸和重量		
		模块LED颗粒数	产品重量	Width EPREL [AGGR]	Length EPREL [AGGR]
PL-LIN-Z6 2200-827 560X20-HV	80	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-850 560X20-HV	80	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-850 560X20-LV	80	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-840 560X20-LV	80	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-850 560X20-LV	80	96	4000 g	20.0 mm	560.0 mm

产品描述	Height EPREL [AGGR]	温度			
		符合 IEC 62717 的性能温度	工作温度范围	温度系数测试点最高温度	仓储温度范围
PL-LIN-Z6 2200-827 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-850 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-850 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-840 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-850 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C


产品描述	环境温度范围	寿命	更多的产品数据	
		L70B50 lifetime [AGGR]	Lumen maintenance factor LMF [AGGR]	Lighting technology used [AGGR]
PL-LIN-Z6 2200-827 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-850 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-850 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-840 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-850 560X20-LV	-20...+75 °C	100000 h	96	LED

产品系列数据表


		认证与标准		物流数据
产品描述	后继 EAN	标准	Energy efficiency class [AGGR]	商品编码
PL-LIN-Z6 2200-827 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 2200-850 560X20-HV		CE/ENEC/VDE	C	85395100000
PL-LIN-Z6 2200-850 560X20-LV	4052899985247	CE/ENEC/VDE	C	85414100000
PL-LIN-Z6 4000-840 560X20-LV	4052899985421	CE/ENEC/VDE	C	85414100000
PL-LIN-Z6 4000-850 560X20-LV	4052899985438	CE/ENEC/VDE	C	85414100000

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)				
产品描述	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-LIN-Z6 2200-827 560X20-HV	18-04-2022	4052899606265	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-850 560X20-HV	18-04-2022	4052899606296	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-850 560X20-LV	18-04-2022	4052899606197	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-840 560X20-LV	18-04-2022	4052899606234	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-850 560X20-LV	18-04-2022	4052899606241	No declarable substances contained	No declarable substances contained


产品系列数据表




PL-LIN-Z6 2200-827 560X20-HV




PL-LIN-Z6 2200-827 560X20-HV

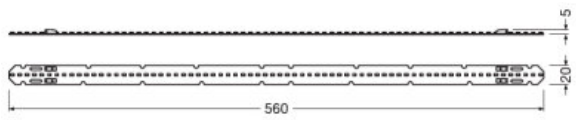

PL-LIN-Z6 2200-827 560X20-LV



PL-LIN-Z6 2200-827 560X20-LV

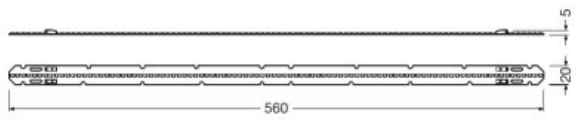

PL-LIN-Z6 4000-865 560x20-LV

产品系列数据表

应用建议

更多详细应用信息和图形,请参阅产品数据表。

数据表文本

- When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

销售和技术支持

销售和技术支持 www.osram.cn

下载数据

文件	
	证书 PL ENEC 40031612 250723
	统一宣言 PL LIN Z6 CE 3812352 090823
	CAD数据3 PL LIN Z5 Z6 2200 560x20 HV CADPDF 240220
	统一宣言 EU Declaration of conformity PL-LIN-Z4 family
	统一宣言 Declaraton of conformity PL-LIN-Z4
	CAD数据3 PL LIN Z5 Z6 2200 560x20 LV CADPDF 240220
	CAD数据3 PL LIN Z5 Z6 4000 560x20 LV CADPDF 240220

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
------	------	---------------	------------------	----	----

产品系列数据表

物流数据

4052899606265	PL-LIN-Z6 2200-827 560X20-HV	箱 120	588 mm x 380 mm x 125 mm	27.93 dm ³	5347.00 g
4052899606296	PL-LIN-Z6 2200-850 560X20-HV	箱 120	588 mm x 380 mm x 125 mm	27.93 dm ³	5347.00 g
4052899606197	PL-LIN-Z6 2200-850 560X20-LV	箱 120	588 mm x 380 mm x 125 mm	27.93 dm ³	5347.00 g
4052899606234	PL-LIN-Z6 4000-840 560X20-LV	箱 120	588 mm x 380 mm x 125 mm	27.93 dm ³	5347.00 g
4052899606241	PL-LIN-Z6 4000-850 560X20-LV	箱 120	588 mm x 380 mm x 125 mm	27.93 dm ³	5347.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。