


ELEMENT G2 24V

恒压 – 不可调光

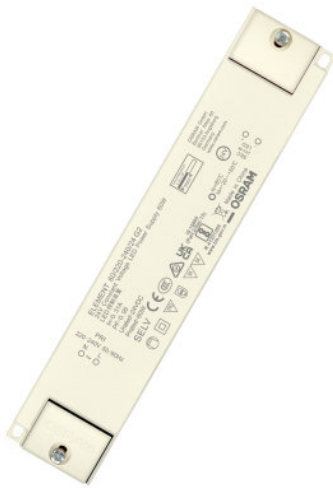

应用领域

- 搁架照明
- 暗槽照明
- 橱柜照明

产品优势

- High efficiency up to 92%

产品特点

- Up to 30,000 h @ T_c max / up to 50,000 h @ T_c -10 °C

产品系列数据表

应用建议

更多详细应用信息和图形,请参阅产品数据表。

数据表文本

- EMI pass verified with wire length of 3 m, from the ECG to the LED module at full load.
- Wiring longer than 3 m from ECG to LED module is possible, but site installation conditions may interfere with EMI with these longer cables. EMI is therefore not verified in this condition.
- For wires longer than 3 m, the appropriate cable cross section must be carefully selected to reduce voltage drop.

销售和技术支持

销售和技术支持 www.osram.cn

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

参考资料/链接

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit [https://](https://www.inventronics-light.com/multilevel-guarantees)

▶ www.inventronics-light.com/multilevel-guarantees

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。