

OT FIT 150/220-240/24 P

OPTOTRONIC FIT 24V P | 恒压 - 不可调光



产品特点

- Small housing design for mounting in coves or linear luminaires
- Versatile scope of application thanks to an output power range of up to 300 W
- Robust and durable design for outdoor applications

应用领域

- For example luminous signage in areas such as hotels
- Public squares and architecture lighting
- 适用于室内外 SELV 类似设施

产品数据表


技术参数

电参数

标称输出功率	150 W
市电频率	50...60 Hz
标称电压	NaN V
设备功率损耗	13 W
功率因数 λ	0.95
浪涌电流	55 安培 ¹⁾
标称输出电压	24 V
交流输入电压	198...264 V
Maximum output power	150 W ²⁾
Output ripple Voltage (100 Hz)	< 2 %
Efficiency in full-load	92 % ³⁾

1) At Full Load, 240VAC, Cold StartDuration=500uS 50%l_{pk} – 50%l_{pk}
2) at steady state
3) at 230 V, 50 Hz

尺寸和重量

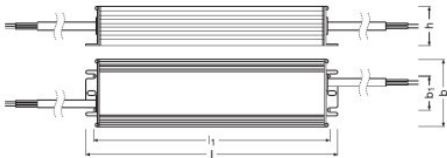

长度	240.0 mm
宽度	53.0 mm
高度	31.5 mm
安装孔距, 长度	188.0 mm
安装孔距, 宽度	27.0 mm
产品重量	610.00 g

温度

环境温度范围	-40...+50 °C ¹⁾
相对湿度	5...85 % ²⁾

1) At fullload, T_c not exceeded

产品数据表

2) 不凝固的

功能

适合带防护等级的固件	I
过热保护	是
过载保护	是
Short-circuit protection	是
标准空载符合	是
可调光	否
Number of channels	1

认证与标准

防护类型	IP66/IP67
标准	根据 IEC 61347-1标准/根据 IEC 61347-2-13标准/根据 EN 55015标准/根据 EN 61547标准/Acc. to EN 61000-2-2/根据 EN 61000-3-2标准/根据 EN 60598-1标准/根据 EN 62384标准
认证标志 - 认证	CE / CCC / TISI / RCM

物流数据

商品编码	85044083900
------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	08-09-2023
Primary Article Identifier	4062172085601
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	3cddb95-b0bd-41a5-b58f-85f41f457d6b

下载数据

文件	
	Product Datasheet Datasheet - OT FIT 150_220-240_24_P

产品数据表

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172085601	OT FIT 150/220-240/24 P	箱 15	349 mm x 284 mm x 153 mm	15.16 dm ³	9751.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.