

LINEARlight Rigid FINESSE



产品特点

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 lm/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

产品优势

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



产品系列数据表

应用领域

- Wall Grazing
- Ambient lighting
- Wall washing
- 暗槽照明
- Architectural integration

产品系列数据表

技术参数


产品描述	Product information	电参数	光度数据			光参数
	Order reference	Accidental reverse input voltage protection up to	光通量	发光强度	灯具效率	光束角
LR-P-2000 -927-10S-BK-15-TB-G1	LR-P-2000-927-1	25 V	3300 lm	5300 cd	0.76	10 °
LR-I-1200 -930-60S-BK-09-SK-G1	LR-I-1200-930-6	25 V	1500 lm		0.72	60 °
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	LR-P-1500-RGBW8	25 V	2500 lm		0.56	10 °
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	LR-P-400-RGB-10	25 V	650 lm			10 °

产品描述	尺寸和重量	颜色和材料			温度
	高度	灯体材料	产品颜色	面板材质	环境温度范围
LR-P-2000 -927-10S-BK-15-TB-G1	330 mm	铝	黑色	聚碳酸酯	-30...+50 °C
LR-I-1200 -930-60S-BK-09-SK-G1	330 mm	铝	黑色	聚碳酸酯	-20...+45 °C
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	330 mm	铝	灰色	聚碳酸酯	-20...+50 °C
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	330 mm	铝	灰色	聚碳酸酯	-20...+50 °C

产品描述	寿命	认证与标准	物流数据	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
	寿命	防护类型	商品编码	Date of Declaration	Primary Article Identifier
LR-P-2000 -927-10S-BK-15-TB-G1	60000 h	IP67	94051190900	27-05-2022	4062172144896
LR-I-1200 -930-60S-BK-09-SK-G1	60000 h	IP43	94051190900	28-06-2022	4062172156226
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	60000 h	IP67	94051190900	28-06-2022	4062172226974
LR-P-400 -RGB-10S-BK-15-TB-G1 2L		IP67	94051190900	28-06-2022	4062172226998

产品描述	Declaration No. in SCIP database	功能	
		可调	色彩控制 (RGB)
LR-P-2000 -927-10S-BK-15-TB-G1	In work		
LR-I-1200 -930-60S-BK-09-SK-G1	In work		
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	In work	否	是
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	In work	否	是


产品系列数据表

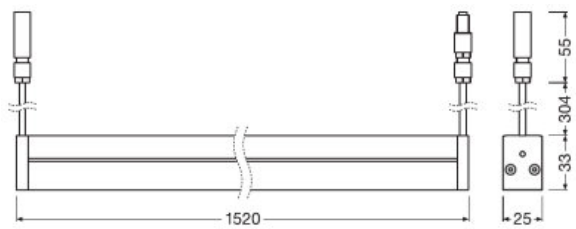

LR-P-2000-927-10S-BK-15-TB-G1 DRAW 200220




LR-P-2000-927-10S-BK-15-TB-G1 DRAW 200220

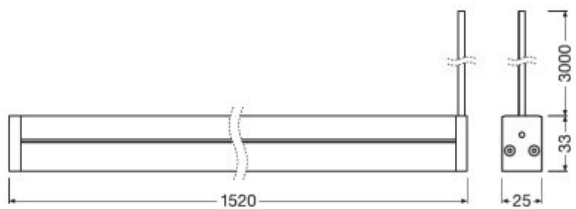

LR-I-1200-930LR-I-1200-930-6 DRAW 270420



LR-I-1200-930LR-I-1200-930-6 DRAW 270420

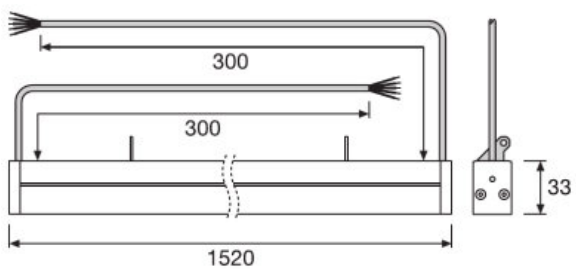

LINEARlight Rigid FINESSE RGB RGBW - 2D drawing dimensions

产品系列数据表

应用建议

更多详细应用信息和图形,请参阅产品数据表。

销售和技术支持

销售和技术支持 www.osram.cn

下载数据

文件	
	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Product Datasheet LINEARlight RIGID FINESSE (EN)
	Product Datasheet LINEARlight RIGID FINESSE RGB (W) (EN)
	小册子 Light is awesome - LINEARlight Rigid FINESSE (EN)
	证书 Finesse LR P fixed CB 04032022
	证书 Finesse LR P fixed D 04032022
	证书 Finesse LR P fixed ENEC
	证书 Finesse LR P floodligh CB 04032022
	证书 Finesse LR P floodligh D 04032022
	证书 Finesse LR P floodligh ENEC 04032022
	CAD数据 LRF-P-2000-ABC-XX-YY-02-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-03-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-04-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-05-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-06-ZZ-G1 STEP 070420

产品系列数据表

	CAD数据3 LRF-P-2000-ABC-XX-YY-07-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-08-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-09-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-10-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-11-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-12-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-13-ZZ-G1 STEP 070420
	CAD数据3 LRF-P-2000-ABC-XX-YY-14-ZZ-G1
	CAD数据3 LRF-P-2000-ABC-XX-YY-15-ZZ-G1
	Eulumdat LR-x-2000-930-10B-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-60S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD
	IES data LR-x-2000-930-10B-xx-10-xx-G1 IES
	IES data LR-x-2000-930-10S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-120D-xx-10-xx-G1 IES
	IES data LR-x-2000-930-30S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-60S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-90T-xx-10-xx-G1 IES
	IES data LR-x-2000-930-WW-xx-10-xx-G1 IES

产品系列数据表

	证书 LR-I Finesse Demko 28022022
	证书 LR-I Finesse ENEC 28022022
	证书 LR-I Finesse CB 28022022
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD 010220
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Red LTD

产品系列数据表

	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 White LTD
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Green IES

产品系列数据表

	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 White IES

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172144896	LR-P-2000 -927-10S-BK-15-TB-G1	箱 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g
4062172156226	LR-I-1200 -930-60S-BK-09-SK-G1	箱 10	1038 mm x 189 mm x 111 mm	21.78 dm ³	10041.00 g
4062172226974	LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	箱 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g
4062172226998	LR-P-400 -RGB-10S-BK-15-TB-G1 2L	箱 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。