

## GFDT500TW-G1 82757-05

GINOLED FLEX Diffuse Tunable White Top |



### 产品特点

- Available for 2500 K to 5700 K CCT adjustable
- 3 SDCM, CRI90
- Up to IP67 protection for outdoor application
- 120° viewing angle per module
- Up to 60,000 hrs lifetime @ tc max

### 产品优势

- Slim design, fit for embedded applications
- Diffuse version, top emitting, high light uniformity without spot or dark area
- Different lengths to meet customer requirements

### 应用领域

- 酒店
- 招牌
- 建筑照明
- 墙壁整合



产品数据表

技术参数

电参数

标称电压	240 V
电流类型	DC
额定功率	2700 W
输入电压范围	23...25 V


光度数据

LED 光色	可调白光
色温	2700 K
显色指数 Ra	80
每米光通量	500 lm

光参数

光束角	110 °
-----	-------

尺寸和重量

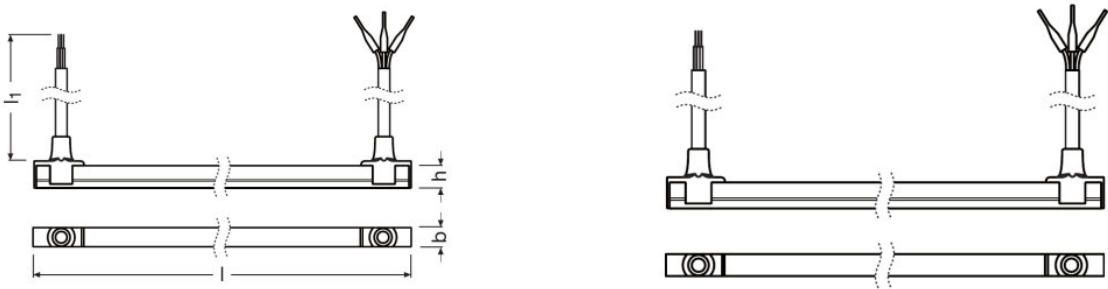

长度	50020 mm
宽度	100 mm
高度	900 mm
接线长度	3800
产品重量	55000 g

温度

环境温度范围	-25...+45 °C
仓储温度范围	-25...80 °C

寿命

产品数据表

额定灯泡寿命	50000 h
标称灯泡寿命	50000 h

认证与标准

标准	Acc. to EN62471/EN62778/ISO 4892-2 - Method A/IEC 60068-2-52 severity 1/RoHS/Reach/CE/IEC60068-2-60 Test Ke Method 4
防护类型	IP65


物流数据

商品编码	940540399000
------	--------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	15-02-2023
Primary Article Identifier	4062172167093
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

下载数据

文件	
	统一宣言 Ginolum Diffuse TW CE 4237513 150823

产品数据表

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 ( 件/单位 )	尺寸 ( 长 x 宽 x 高 )	体积	毛重
4062172167093	GFDT500TW-G1 82757-05	箱 10	370 mm x 370 mm x 380 mm	52.02 dm <sup>3</sup>	8380.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

可选择性配件

产品描述	配件名称	配件代码
GFDT500TW-G1 82757-05	FX-GFPM-G1-TT-13H11- -20	▶ 4062172147514
GFDT500TW-G1 82757-05	FX-GFPM-G1-TT-13H11- -1000	▶ 4062172147538
GFDT500TW-G1 82757-05	FX-GFDT13-G1 -ENDCAP	▶ 4062172167116

免责声明

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.