

Recessed slim profile 15x6mm

LED 软灯带配件

产品特点

- Compatible with LINEARlight Flex and TEC Flex
- Compatible with LINEARlight Flex and TEC Flex



产品优势

- 经过氧化处理，铝型材坚固、耐腐蚀


产品系列数据表

技术参数

	尺寸和重量		物流数据	Environmental information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
产品描述	长度	产品重量	商品编码	Date of Declaration
FX-QMS-G1 -TU15H6W3-300	3000 mm	26700 g	76042990900	30-08-2022
FX-QMS-G1 -EFGP-TU15H6W3	220 mm	058 g	39269097900	30-08-2022
FX-QMS-G1 -CFDB-300	3000 mm	5175 g	39169050900	30-08-2022

产品描述	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX-QMS-G1 -TU15H6W3-300	4052899448889	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -EFGP-TU15H6W3	4052899449138	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFDB-300	4052899446991	No declarable substances contained	No declarable substances contained


产品系列数据表

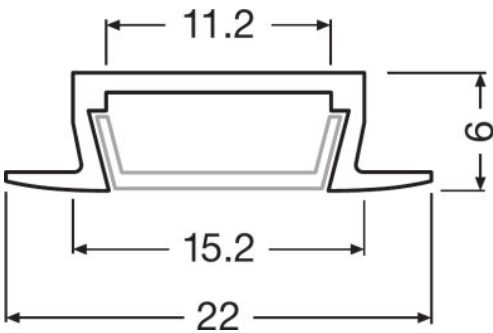

728417_TU15H6W3




728998_FX-QMS-G1-TU15H6W3-300

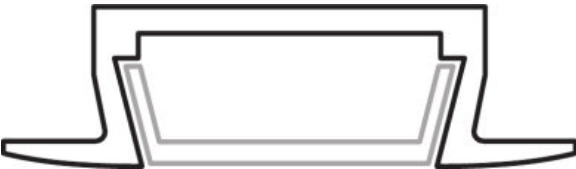


728449_TU15H6W3



729120_FX-QMS-G1-TU15H6W3-300

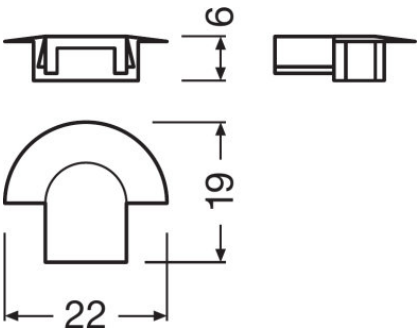

729004_FX-QMS-G1-EFGP-TU15H6W3

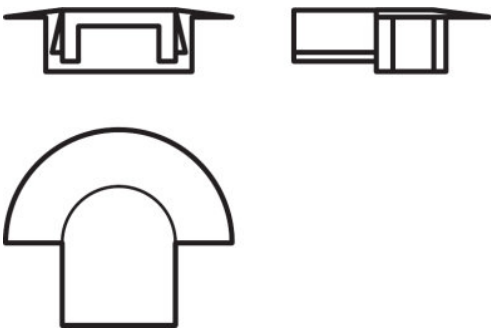


729072_FX-QMS-G1-EFGP-TU15H6W3

产品系列数据表



729001_FX-QMS-G1-CFDB-300



729069_FX-QMS-G1-CFDB-300

应用建议

更多详细应用信息和图形,请参阅产品数据表。

销售和技术支持

销售和技术支持 www.osram.cn

下载数据

文件	
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)
	小册子 Light is freedom of design (EN)
	CAD数据 CAD file slim profile TU15H6W3
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)
	Product Datasheet Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300

产品系列数据表

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4052899448889	FX-QMS-G1 -TU15H6W3-300	箱 40	3020 mm x 100 mm x 100 mm	30.20 dm ³	11760.00 g
4052899449138	FX-QMS-G1 -EFGP-TU15H6W3	箱 400	175 mm x 145 mm x 110 mm	2.79 dm ³	336.00 g
4052899446991	FX-QMS-G1 -CFDB-300	箱 40	3060 mm x 225 mm x 225 mm	154.91 dm ³	3293.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

可选择性配件

产品描述	配件名称	配件代码
FX-QMS-G1 -TU15H6W3-300	FX-QMS-G1 -CFDB-300	▶ 4052899446991
FX-QMS-G1 -TU15H6W3-300	FX-QMS-G1 -EFGP-TU15H6W3	▶ 4052899449138

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。