

Corner surface slim profile 19x19 mm

LED 软灯带配件

产品特点

- Compatible with TEC Flex



产品优势

- 经过氧化处理，铝型材坚固、耐腐蚀


产品系列数据表

技术参数


	尺寸和重量		物流数据	Environmental information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
产品描述	长度	产品重量	商品编码	Date of Declaration
FX-QMS-G1 -BMZI-T45D19H19	200 mm	143 g	76169990990	30-08-2022
FX-QMS-G1 -CFDB-300	3000 mm	5175 g	39169050900	30-08-2022

产品描述	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX-QMS-G1 -BMZI-T45D19H19	4052899446960	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFDB-300	4052899446991	No declarable substances contained	No declarable substances contained

产品系列数据表

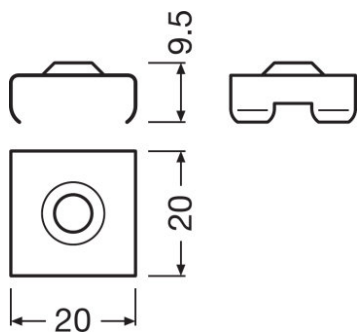

729003_FX-QMS-G1-BMZI-T45D19H19



729001_FX-QMS-G1-CFDB-300



729069_FX-QMS-G1-CFDB-300

应用建议

更多详细应用信息和图形,请参阅产品数据表。

销售和技术支持

销售和技术支持 www.osram.cn

下载数据

文件	
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN)
	小册子 Light is freedom of design (EN)

产品系列数据表

	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)
	Product Datasheet Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4052899446960	FX-QMS-G1 -BMZI-T45D19H19	箱 400	175 mm x 145 mm x 110 mm	2.79 dm ³	676.00 g
4052899446991	FX-QMS-G1 -CFDB-300	箱 40	3060 mm x 225 mm x 225 mm	154.91 dm ³	3293.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。