

OT 75/220...240/24 E

24 V 恒压驱动电源



产品特点

- 直流模式功能

应用领域

- 适用于室内外设施

产品数据表


技术参数

电参数

标称输出功率	75 W ¹⁾
市电频率	50...60 Hz
标称电压	220...240 V
标称电流	0.38 安培
设备功率损耗	8.5 W ²⁾
功率因数 λ	0.95 ³⁾
浪涌电流	41 安培 ⁴⁾
初级/次级电气隔离	3.75 kV ⁵⁾
标称输出电压	24 V ⁶⁾
交流输入电压	198...264 V ⁷⁾
Efficiency in full-load	89 % ⁸⁾

- 1) 分载 0...75 W
- 2) 最大
- 3) 最小
- 4) 位宽 = 200µs (在50%电流峰值处测得)
- 5) SELV
- 6) 电子稳定, 线纹波电压最大±0.2 v
- 7) 允许电压范围
- 8) at 230 V, 50 Hz

尺寸和重量

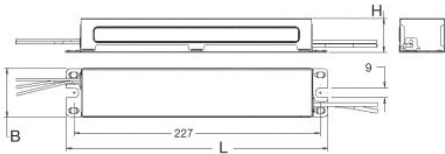

长度	241.0 mm
宽度	43.0 mm
高度	30.0 mm
安装孔距, 长度	227.0 mm
产品重量	560.00 g

产品数据表

温度

环境温度范围	-20...+60 °C
相对湿度	5...85 % ¹⁾

¹⁾ 在85%的相对湿度下最多工作56天/年

功能

适合带防护等级的固件	II
过热保护	自动可逆
过载保护	自动可逆
Short-circuit protection	自动可逆
标准空载符合	是
可调光	否
Number of channels	1

认证与标准

防护类型	IP64
标准	根据 IEC 61347标准/根据 IEC 60598标准/根据 IEC 62384标准/根据 EN 55015:2006 + A1:2007标准/根据 EN 61000-3-2标准/根据 EN 61547标准
认证标志 - 认证	CE / VDE / VDE-EMC / CB / RCM / ENEC 10

物流数据

商品编码	850440829000
------	--------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	20-01-2023
Primary Article Identifier	4008321362476
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	fe529a50-c7af-4d94-92a6-262a7ef7e3ce

下载数据

文件

产品数据表

	Addon Technical Information 328949_ATI OPTOTRONIC OT 75220-24024 E (GB)
	Addon Technical Information 328950_ATI OPTOTRONIC OT 75220-24024 E (D)
	小册子 OPTOTRONIC constant-voltage LED power supplies and controls (EN)
	证书 OT ENEC 40038447 260623
	统一宣言 334820_Declaration of conformity OT 75220-24024 E

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4008321362476	OT 75/220...240/24 E	箱 10	278 mm x 126 mm x 268 mm	9.39 dm³	6146.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

免责声明

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.